


SP647E Instructions



SP647E SPI CCT LED Controller

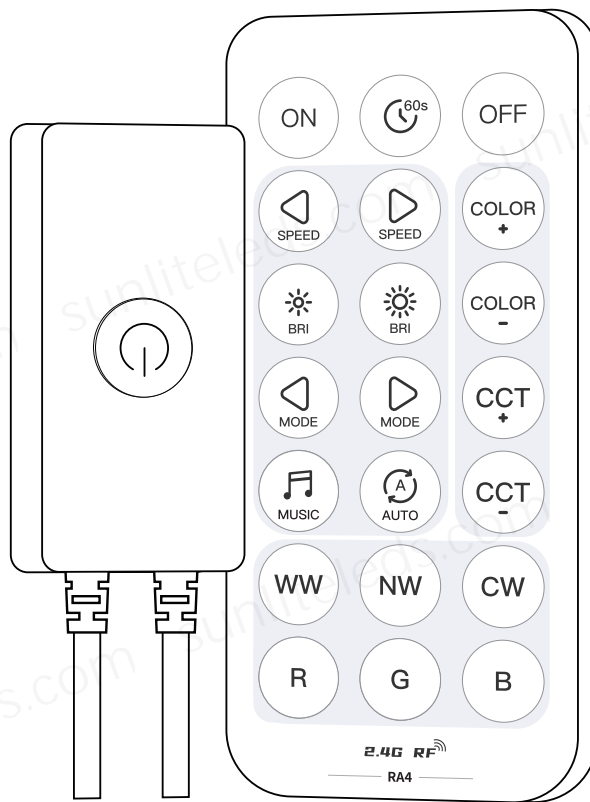

1. Brief:

SPI dual channel addressable CCT LED controller, controlling 2 channels of single-wire RZ LED driver IC to achieve static dimming, dynamic effects, music effects.

2. Features:


1. Support App control and 2.4G remote control;
2. Support up to 600 single-wire RZ RGB LED driver ICs;
3. Built-in a variety of CCT dynamic effects and music effects, with multiple adjustable parameters;
4. Capture music through the phone microphone, player streamer and on-board microphone;
5. Support effect collection;
6. With a variety of ON/OFF animation effects;
7. With ON/OFF timer function;
8. Support OTA firmware upgrade.

3. APP:



1. SP647E supports App control for iOS and Android devices.
2. Apple devices require iOS 10.0 or higher, and Android devices require Android 4.4 or higher.
3. You can search "BanlanX" in App Store or Google Play to find the APP, or scan the QR code to download and install


Operations

- Open the App, click the + icon in the top right corner of the home page to add device;
- Click the  icon in the upper right corner of the App to enter the settings page, where you can modify the device name, set the timings, set the on/off effect, OTA firmware upgrade, etc.

4. Work With 2.4G Remote Control:

The 2.4G remote control models (RA2) matched with SP647E are as follows:

- Support one-to-many control, one remote control can control multiple controllers.
- Support many-to-one control, each controller can bind up to 5 remote controls.

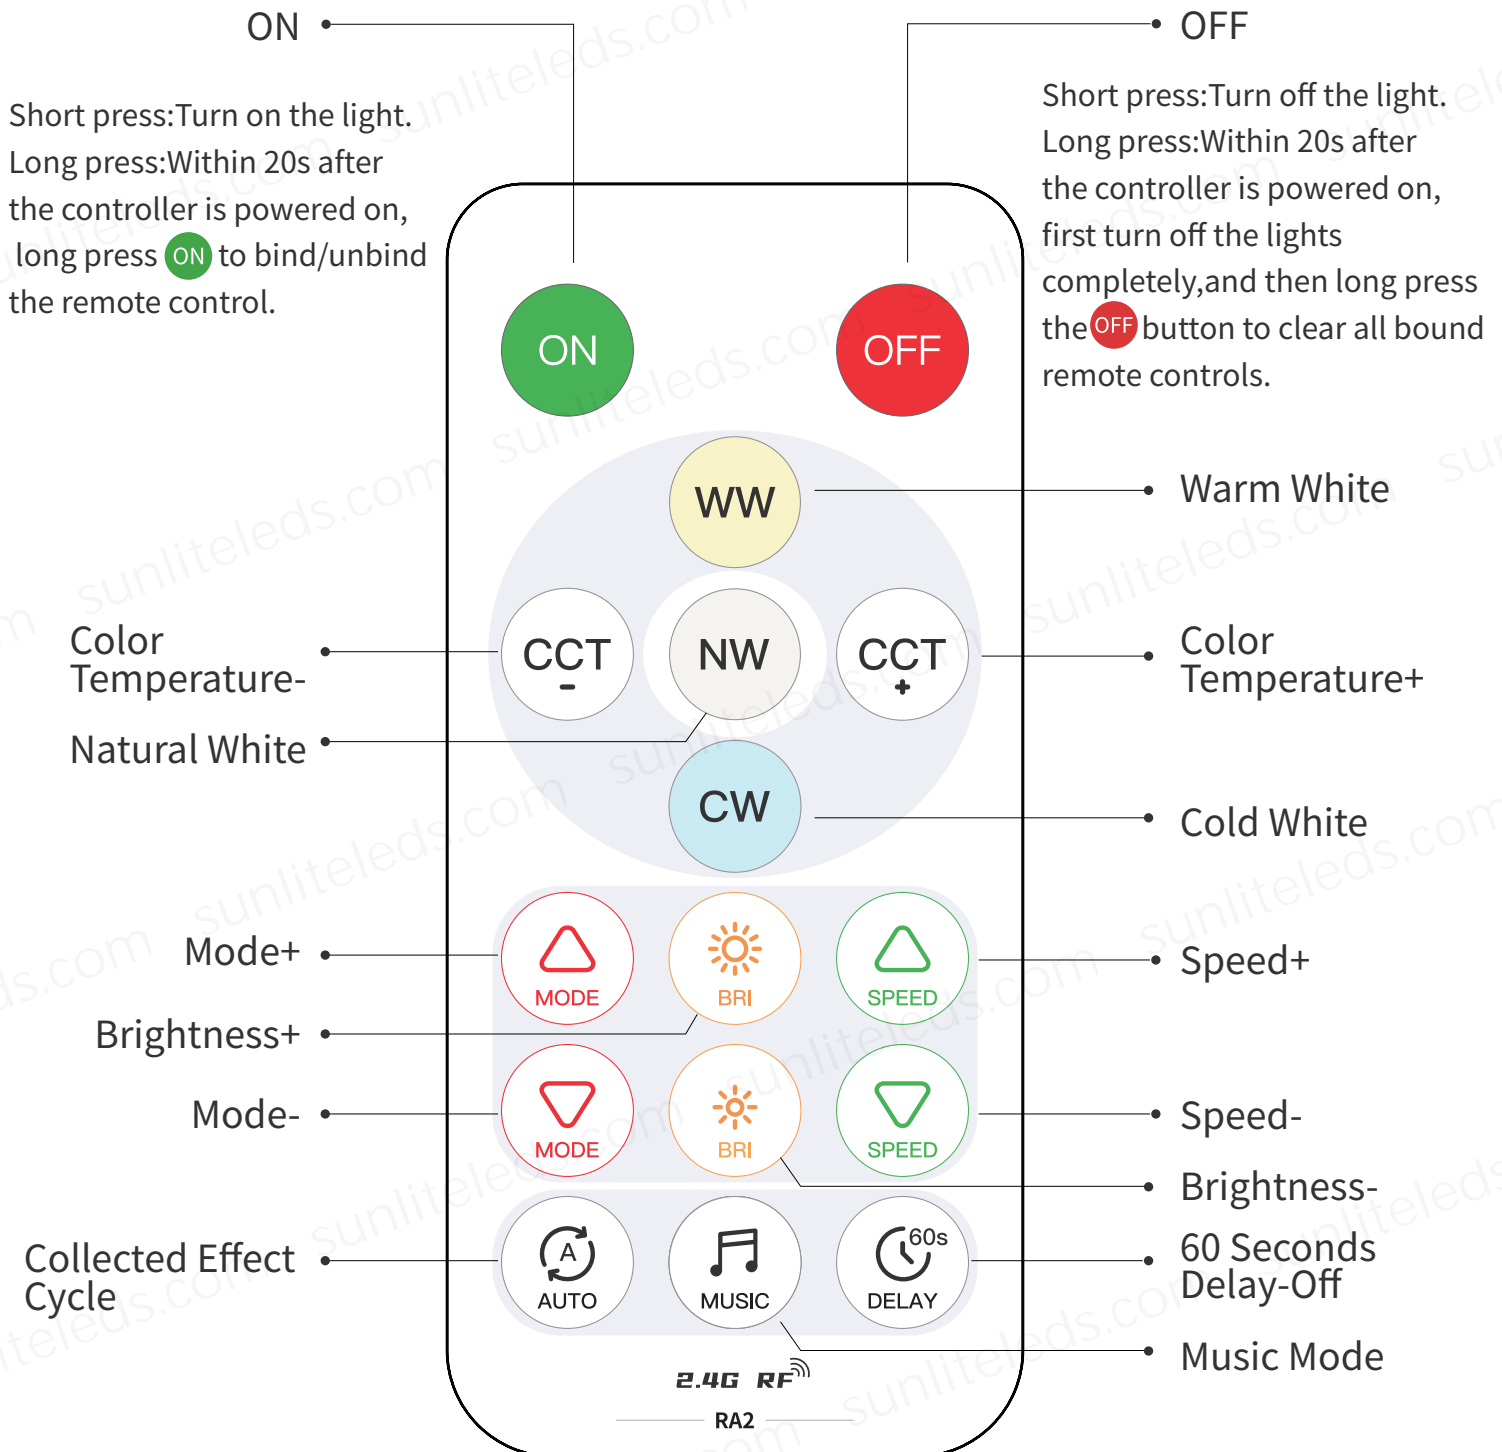

5. Technical Parameters:

Working Voltage: DC5V~24V	Working Current: 12mA~25mA
Working Temp: -20°C~60°C	Dimension: 55mm*26mm*12mm (not including the wires)

6. Wiring

